VISTAFOLIA

UV-IFR FLOWERING HEDGE

Copyright © 2026, Vistafolia Limited, All rights reserved.

"Vistafolia®'s Luxury Flowering Hedges have been designed to create a beautiful green environment with a realistic effect even in the most inhospitable planting locations".

Product Description

The standard size hedge comprises UV Stabilised & Fire Rated artificial foliage fixed with stainless steel ties to a powder coated stainless steel frame.

Installation Accessory

Compatible hedge mounting bracket available. Bracket independently tested to ASTM 935-21 Sections 10.5 and 10.6.

Features

- Overlapping foliage removes join lines
- Durable panels manufactured to ISO 9001
- UV & Fire Rated with test certificates
- REACH Compliant
- Quick and easy installation
- Customisable with a range of Colour & Texture boxes

Technical Specifications

Standard Size Panel	87.5 × 80 × 28 cm / 31.5″ x 31.5″ x 11″
Coverage	1 Hedge = 0.7 sqm / 7.5 sq ft
Weight	Approx. 13 kg / 29 lbs per hedge
Box Size	85 cm x 85 cm x 30 cm / 33.5″ x 33.5″ x11.8″
Box Weight	Approx. 16 kg / 38lbs
Distribution	160 plants per hedge
Colour Reference	Mixed colours
Materials	Foliage: UV/FR LDPE Grid: 3mm / 0.118″ stainless steel 304 Ties: 1mm / 0.039″ stainless steel 304
Manufacturing process	Injection moulded foliage, individually tied to grid
Packing	One hedge
Warranty	5-year in the UK

UV - IFR
UV - IFR Technology

Quality Standard

Tested & Certified

5 Year UK Warranty

Low Maintenance

Recyclable*
**Check with local authority*

Unit 6 Trade City, Lyon Way,
Frimley, Camberley, Surrey
GU16 7AL United Kingdom

Vistafolia Ltd.
+44 (0)20 7385 1020
info@vistafolia.com

Learn more:
www.vistafolia.com

COPYRIGHT. ALL RIGHTS RESERVED

Quality Standards / Certification:

UV Test:

BS EN ISO 4892-2: 2013 - 'Plastics - Methods of Exposure to Laboratory Light Sources - Xenon-arc lamps.

Reaction to fire:

BS EN 13501-1:2018 - B S3 D0	NFPA 701 - PASS
ASTM E84 - CLASS A	UL94HB - PASS

Test results relate to the specific product formulation and configuration tested. Certificates available upon request.

Independent dynamic wind load testing (positive and negative pressure) demonstrated that the Vistafolia® system maintained structural integrity with no observed failures or abnormalities at pressures up to ±7,600 Pa. (≈400 km/h),

Freeze/Thaw test:

MIL-STD-810G Method 524.

HEDGE PROFILE

1 Hedge = 0.7 sqm / 7.5 sq ft

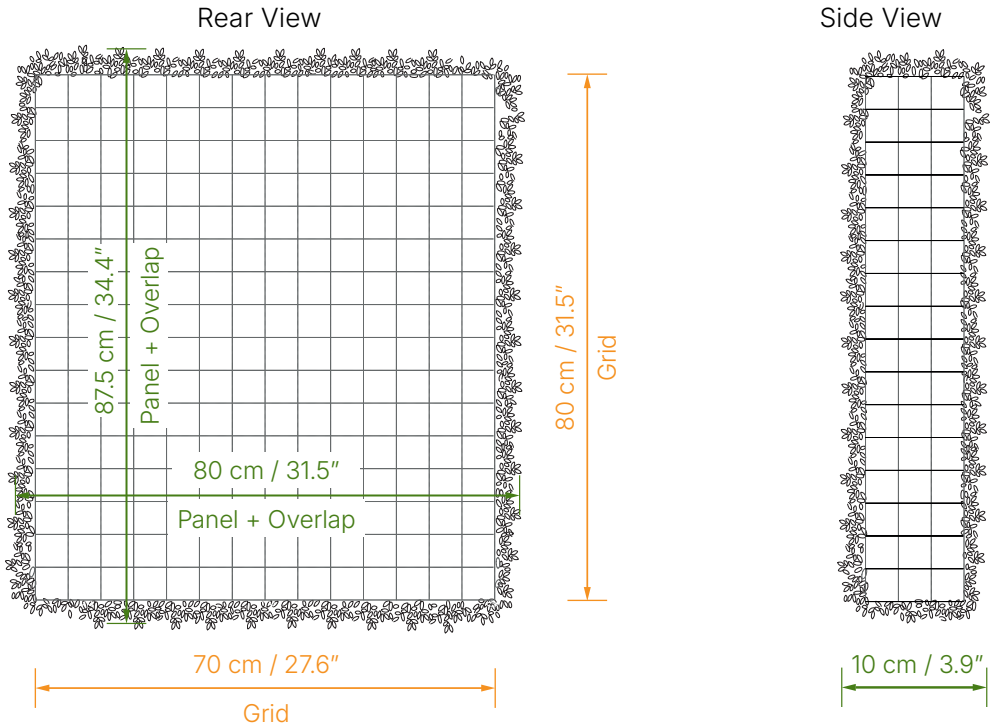

Vistafolia® Hedges are constructed using durable UV stabilised artificial foliage securely fixed to a galvanised steel frame. Designed for long term outdoor performance, they provide an instant, maintenance free green screen suitable for commercial and residential applications.

Information provided for general guidance only and does not constitute professional advice or a warranty of regulatory compliance. Suitability and compliance depend on the specific application, substrate, system build-up, and local requirements. Customers must take professional advice and satisfy themselves as to compliance for their intended use.

Unit 6 Trade City, Lyon Way,
Frimley, Camberley, Surrey
GU16 7AL United Kingdom

Vistafolia Ltd.
+44 (0)20 7385 1020
info@vistafolia.com

Learn more:
www.vistafolia.com
COPYRIGHT. ALL RIGHTS RESERVED